



[www.keyfire.com](http://www.keyfire.com)

*Manufacturing Excellence  
Since 1988*


**Are You Really  
Ready?**

---

# PRO-FLOW

## LDH

- *10 Year Warranty*
- *Single Homogeneous Construction*
- *Abrasion Resistance*
- *Cold Resistance*
- *Chemical Resistance*
- *Heat Resistance*

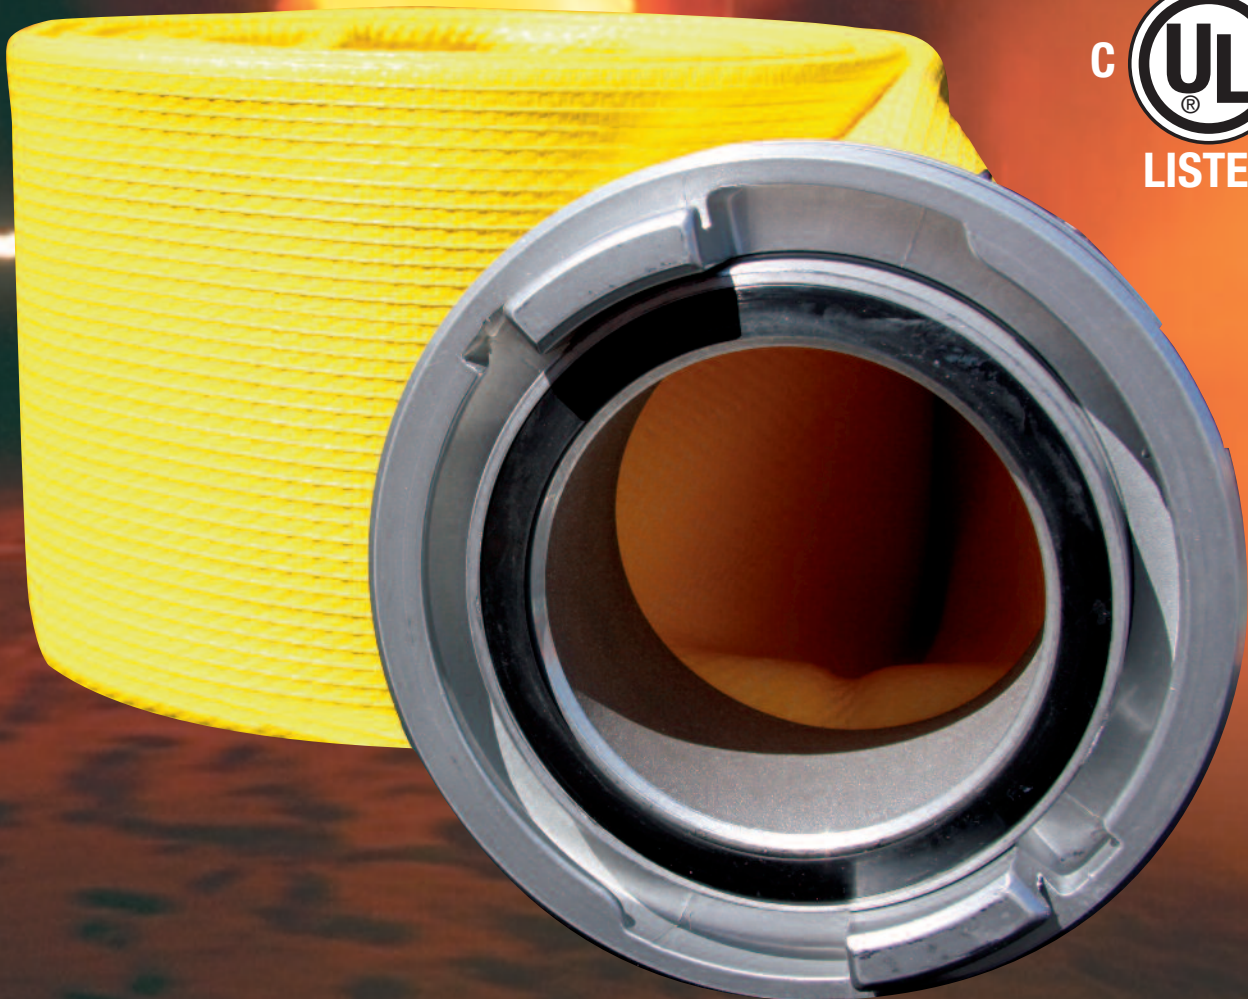



Visit us on the Web: [www.keyfire.com](http://www.keyfire.com)

# Pro-Flow LDH Specification Sheet

## • Rubber Covered Hose

## • 3", 4", 5", and 6"

### ▶ Hose Construction

Hose shall be made from 100 percent high tenacity synthetic yarn, circularly woven and completely protected and locked-in by tough highly resistant synthetic nitrile rubber, forming a single homogeneous construction without the use of glues or adhesives of any type. Meeting all requirements of NFPA 1961.

**Warranty:** Hose shall carry a **ten year** written warranty.

### ▶ Lining Properties

#### Ultimate Tensile Strength:

Tensile strength of the lining and cover shall not be less than 1750 PSI.

#### Ultimate Elongation:

500 percent minimum.

#### Accelerated Aging Test:

The tensile strength and ultimate elongation of the vulcanized rubber compound which has been subjected to the action of oxygen at a pressure of 300 PSI ( $\pm 10$  PSI) and a temperature of 158° ( $\pm 18^\circ$ F) for a period of 96 hours shall retain 60 percent of its originally stated properties.

### ▶ Abrasion Resistance

Hose shall withstand 30,000 cycles on the Taber Abrasion Machine (H-22 Wheel: 1/2 kg). Key Fire Hose Corporation on request will supply written warranties that PRO-FLOW hose meets a minimum 30,000 cycles. Other abrasion test results (UL, DIN, etc.) can be supplied on request of purchaser.

### ▶ Cold Resistance

Hose shall have a capability of use down to -35°F. Hose shall have no apparent damage to cover, reinforcement or lining when subjected to the following cold bending test: a 50 ft. length of dry hose is to be firmly coiled and placed in a cold box at -35°F for a duration of 24 hours. Immediately after removal of the hose from the box, hose should be uncoiled and laid out by one operator. Following this procedure, the hose shall not leak nor show any damage to the reinforcement when subjected to the hydrostatic acceptance test stated above.

### ▶ Hydrostatic Pressure Tests

Part Number	Diameter	Service Test Pressure	Acceptance Test Pressure	Burst Pressure
RC30-500	3"	300psi	600psi	900psi
RC40-500	4"	250psi	500psi	750psi
RC50-400	5"	225psi	450psi	675psi
RC60-300	6"	225psi	450psi	675psi

### ▶ Ozone Resistance

Hose shall show no visible signs of cracking to the lining or cover when tested in accordance to ASTM D518 Procedure B, 100pphm/118°F/70 hours.

### ▶ Chemical Resistance

Exposure to sea water and contamination by most chemical substances, hydrocarbons, oils, alkalis, acids and greases must have no effect on the short or long term performance of the hose. A chemical resistance chart is available and Key Fire Hose will supply specific chemical resistance data on request of purchaser for unique applications.

### ▶ Heat Resistance

The hose, when subjected to a static pressure of 100 PSI, shall be capable of withstanding a surface temperature of 1200°F for a minimum of two minutes without rupture or damage to the synthetic reinforcement.

### ▶ Color

The color shall be of HI-VISIBILITY yellow or red. Other colors available upon request.

### ▶ Couplings

As required by purchaser, expansion ring threaded, STORZ clamp ring, etc.

Key reserves the right to modify any specification without prior notice to meet or exceed changing standards. Customers are advised that special diameters or construction characteristics can be produced on special request and you are requested to contact Key Fire Hose Corp. Miami, Florida.

### ▶ Hose Weight and Coil Diameters

The hose shall conform to the following average weights and diameters.

Part Number	Diameter	Weight per foot uncoupled	Coil Size Uncoupled 100' Lengths
RC30-500	3"	.60 lbs	24"
RC40-500	4"	.74 lbs	24"
RC50-400	5"	.93 lbs	27"
RC60-300	6"	1.35 lbs	34"